


PVDF REDUCER

concentric, elongated
for butt welding molded from PVDF
对接大小头

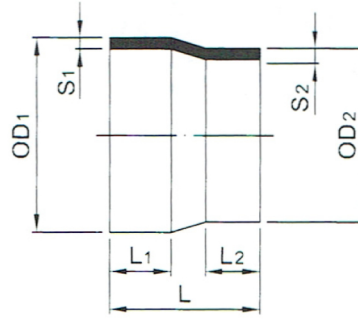

OD ₁ /OD ₂ (mm)	L (mm)	L ₁ (mm)	L ₂ (mm)	SDR33 ISO S16 PN10	SDR21 ISO S10 PN16
				S ₁ /S ₂ (mm)	S ₁ /S ₂ (mm)
25-20	50	20	20	-	1.9/1.9
32-20	50	20	20	-	2.4/1.9
32-25	50	20	20	-	2.4/1.9
40-20	55	20	20	-	2.4/1.9
40-25	55	20	20	-	2.4/1.9
40-32	55	20	20	-	2.4/2.4
50-20	60	24	20	-	3.0/1.9
50-25	60	24	20	-	3.0/1.9
50-32	60	24	20	-	3.0/2.4
50-40	60	24	20	-	3.0/2.4
63-25	65	25	20	-	3.0/1.9
63-32	65	25	22	-	3.0/2.4
63-40	65	25	22	-	3.0/2.4
63-50	65	25	22	-	3.0/3.0
75-40	68	25	24	-	3.6/2.4
75-50	68	25	24	-	3.6/3.0
75-63	68	25	24	2.3/2.0	3.6/3.0
90-50	75	30	26	-	4.3/3.0
90-63	75	30	26	2.8/2.0	4.3/3.0
90-75	75	30	26	2.8/2.3	4.3/3.6
110-63	90	35	30	3.4/2.0	5.3/3.0
110-75	90	35	30	3.4/2.3	5.3/3.6
110-90	90	35	30	3.4/2.8	5.3/4.3
125-110	100	40	35	3.9/3.4	6.0/5.3
140-125	110	45	40	4.3/3.9	6.7/6.0
160-110	130	60	40	4.9/3.4	7.7/5.3
160-140	130	60	40	4.9/4.3	7.7/6.7
180-160	130	60	40	5.5/4.9	8.6/7.7
200-160	140	60	40	6.2/4.9	9.6/7.7
225-160	150	60	40	6.9/4.9	10.8/7.7
225-200	150	60	50	6.9/6.2	10.8/9.6
250-225	170	70	60	7.7/6.9	11.9/10.8
280-250	180	80	60	8.6/7.7	13.4/11.9
315-280	220	90	80	9.7/8.6	15.0/13.4