


PVDF ADAPTOR


With female thread for socket welding molded from PVDF
套接内牙阀接头

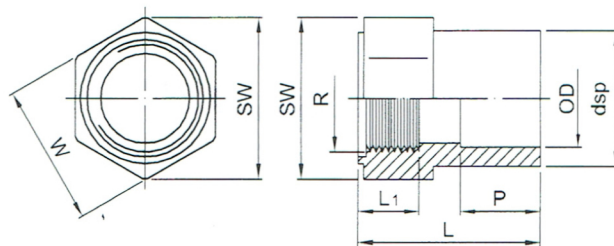

OD (mm)	dsp ^{±1} (mm)	L ^{±2} (mm)	P ^{±0.2} (mm)	L ₁ ^{±2} (mm)	R (mm)	W x SW ^{±1.5} (mm)
20	28.5	45.4	29.0	16.0	1/2" BSP	31.8x35.1
25	34.4	50.7	33.2	17.0	3/4" BSP	40.5x44.2
32	42.8	57.5	37.2	20.0	1" BSP	45.7x50.3
40	51.5	62.7	38.3	24.0	1-1/4" BSP	54.7x59.9
50	63.5	68.9	43.7	24.5	1-1/2" BSP	69.0x76.2
63	79.0	74.1	45.3	28.5	2" BSP	83.6x92.8

PVDF ADAPTOR

With male thread for socket welding molded from PVDF
套接外牙阀接头

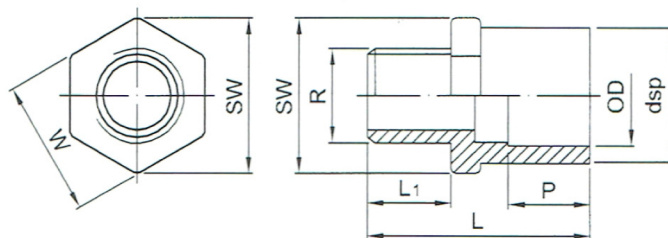

OD (mm)	dsp ^{±1} (mm)	L ^{±1.5} (mm)	L ₁ ^{±1} (mm)	P ^{±0.2} (mm)	R (mm)	W x SW ^{±1} (mm)
20	28.4	46.5	18.5	19.8	1/2" BSP	30.3x33.3
25	34.3	51.5	20.8	22.6	3/4" BSP	36.8x40.8
32	42.5	61.5	24.0	28.3	1" BSP	44.3x49.1
40	51.5	67.4	27.7	29.4	1-1/4" BSP	53.5x59.0
50	63.5	74.5	29.0	33.0	1-1/2" BSP	65.0x72.0
63	79.3	79.4	32.0	35.0	2" BSP	81.1x90.2