


PP-H REDUCER CONCENTRIC

for butt welding molded from PP-H
对接塔型大小头

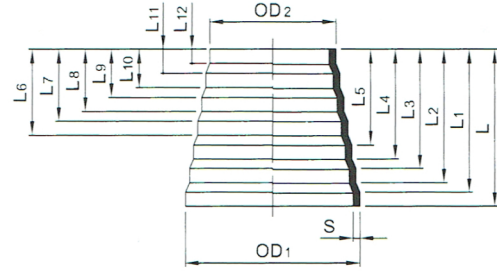

OD ₁ /OD ₂ (mm)	L ₁ (mm)	L ₂ (mm)	L ₃ (mm)	L ₄ (mm)	L ₅ (mm)	L ₆ (mm)	L ₇ (mm)	L ₈ (mm)	L ₉ (mm)	L ₁₀ (mm)	L ₁₁ (mm)	L ₁₂ (mm)
50/20	30.8	27.3	21.5	18.5	13.5	11.0	6.0	4.0	-	-	-	-
63/16	70.5	62.5	53.5	46.5	38.5	33.0	25.0	21	15	12	7	5
75/32	62.5	54.5	45.5	37.5	28.5	21.5	13.5	8	-	-	-	-
110/50	60.8	51.6	41.6	35.1	25.6	21.1	10.6	6.3	-	-	-	-
110/63	57.0	47.0	36.0	28.0	17.0	9.0	-	-	-	-	-	-
125/75	63.0	53.0	40.0	30.0	19.0	11.0	-	-	-	-	-	-
160/110	74.0	62.0	48.0	37.0	23.0	13.0	-	-	-	-	-	-
180/110	101.5	90.5	75.5	65	50	39.5	24.5	15	-	-	-	-
225/160	87.0	71.0	55.0	42.0	26.0	14.0	-	-	-	-	-	-
315/180	112.5	101.5	86	65	50	39.5	24.5	15	-	-	-	-
315/225	109.0	89.0	70.0	54.0	35.0	19.0	-	-	-	-	-	-
450/315	148.0	118.0	92.0	68.0	44.0	24.0	-	-	-	-	-	-
630/450	214.0	178.0	132.0	100.0	62.0	32.0	-	-	-	-	-	-

PN6	16	20	25	32	40	50	63	75	90	110	125	140	160	180	200	225	250	280	315	355	400	450	500	560	630
S	-	1.8	1.8	1.8	2.3	2.9	3.6	4.3	5.1	6.3	7.1	8.0	9.1	10.2	11.4	12.8	14.2	15.9	17.9	20.1	22.7	25.5	28.3	31.7	35.7
PN10	16	20	25	32	40	50	63	75	90	110	125	140	160	180	200	225	250	280	315	355	400	450	500	560	630
S	2.0	2.5	2.7	3.0	3.7	4.6	5.8	6.9	8.2	10.0	11.4	12.8	14.6	16.4	18.2	20.5	22.8	25.5	28.7	32.3	36.4	41.0	45.5	50.9	57.2

OD ₁ /OD ₂ (mm)	L (mm)
50/20	37.1+0.2
63/16	79.5+2
75/32	73.5+2
110/50	72.8+0.2
110/63	70.0+2
125/75	77.0+2
160/110	88.0+2
180/110	116.5+1
225/160	106.0+3
315/180	128+1
315/225	133.0+3
450/315	180.0+4
630/450	276.0+4