


PP-H REDUCER

concentric, elongated
for butt welding molded from PP-H
对接大小头

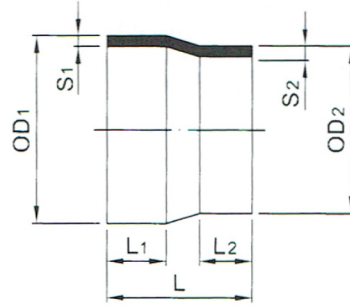

OD ₁ /OD ₂ (mm)	L (mm)	L ₁ (mm)	L ₂ (mm)	SDR17.6 ISO S8.3 PN6	SDR11 ISO S5 PN10
				S ₁ /S ₂ (mm)	S ₁ /S ₂ (mm)
25-20	50	20	20	1.8/1.8	2.7/2.5
32-20	50	20	20	1.9/1.8	3.0/2.5
32-25	50	20	20	1.9/1.8	3.0/2.7
40-20	55	20	20	2.3/1.8	3.7/2.5
40-25	55	20	20	2.3/1.8	3.7/2.7
40-32	55	20	20	2.3/1.9	3.7/3.0
50-20	60	24	20	2.9/1.8	4.6/2.5
50-25	60	24	20	2.9/1.8	4.6/2.7
50-32	60	24	20	2.9/1.8	4.6/3.0
50-40	60	24	20	2.9/2.3	4.6/3.7
63-25	65	25	20	3.6/1.8	5.8/2.7
63-32	65	25	22	3.6/1.9	5.8/3.0
63-40	65	25	22	3.6/2.3	5.8/3.7
63-50	65	25	22	3.6/2.9	5.8/4.6
75-40	68	25	24	4.3/2.3	6.9/3.7
75-50	68	25	24	4.3/2.9	6.9/4.6
75-63	68	25	24	4.3/3.6	6.9/5.8
90-50	75	30	26	5.1/2.9	8.2/4.6
90-63	75	30	26	5.1/3.6	8.2/5.8
90-75	75	30	26	5.1/4.3	8.2/6.9
110-63	90	35	30	6.3/3.6	10.0/5.8
110-75	90	35	30	6.3/4.3	10.0/6.9
110-90	90	35	30	6.3/5.1	10.0/8.2
125-110	100	40	35	7.1/6.3	11.4/10.0
140-125	110	45	40	8.0/7.1	12.8/11.4
160-110	130	60	40	9.1/6.3	14.6/10.0
160-140	130	60	40	9.1/8.0	14.6/12.8
180-160	130	60	40	10.2/9.1	16.4/14.6
200-160	140	60	40	11.4/9.1	18.2/14.6
225-160	150	60	40	12.8/9.1	20.5/14.6
225-200	150	60	50	12.8/11.4	20.5/18.2
250-225	170	70	60	14.2/12.8	22.8/20.5
280-250	180	80	60	15.9/14.2	25.5/22.8
315-280	220	90	80	17.9/15.9	28.7/25.5