


PP-H REDUCER

for socket welding
 molded from PP-H
 套接大小头

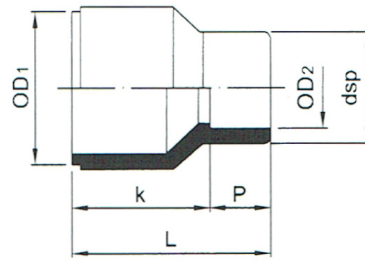

OD ₁ /OD ₂ (mm)	dsp (mm)	k (mm)	P (mm)	L (mm)	SDR11 ISO S5 PN10
					Weight (kg/Pc.)
20/16	23.5	21.0	14.0	35.0	0.004
25/16	23.8	25.5	14.5	40.0	0.008
25/20	28.7	24.5	15.5	40.0	0.008
32/20	28.8	28.7	15.3	44.0	0.012
32/25	34.0	26.5	17.5	44.0	0.016
40/20	28.3	33.8	15.2	49.0	0.018
40/25	34.2	32.0	17.0	49.0	0.020
40/32	42.0	29.5	19.5	49.0	0.024
50/20	28.5	39.8	15.2	55.0	0.026
50/25	34.5	38.1	16.9	55.0	0.032
50/32	43.0	35.5	19.5	55.0	0.034
50/40	51.5	33.0	22.0	55.0	0.038
63/25	34.6	46.3	17.2	63.5	0.048
63/32	42.7	44.7	19.8	64.5	0.052
63/40	51.0	42.0	21.5	63.5	0.058
63/50	63.0	40.0	24.0	64.0	0.068
75/63	81.0	36.1	28.2	64.3	0.102
90/63	80.5	59.0	28.2	87.2	0.172
90/75	91.0	54.0	32.5	86.5	0.178
110/63	80.0	58.5	28.0	86.5	0.224
110/90	112.0	50.1	36.5	86.6	0.272