


# HD-PE STUB FLANGE

acc. DIN 16962/16963

for butt welding molded from PE100

对接法兰头

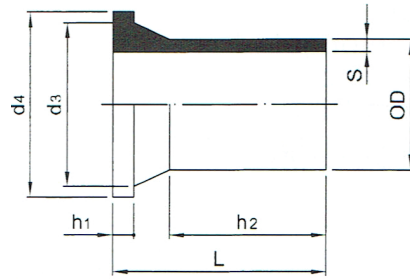

OD (mm)	L (mm)	d <sub>3</sub> (mm)	d <sub>4</sub> (mm)	h <sub>2</sub> (mm)	SDR17 ISO S8 PN10		SDR11 ISO S5 PN16	
					S (mm)	h <sub>1</sub> (mm)	S (mm)	h <sub>1</sub> (mm)
20	50	26	45	29	1.8	7.2	1.9	7.0
25	52	32	58	27	1.8	9.2	2.3	9.0
32	54	40	68.0	28	1.9	10.0	2.9	10.0
40	56	49	78	25	2.3	11.0	3.7	11.0
50	62	60	88	32	4.3	12.2	4.6	12.0
63	68	75	102	38	3.6	14.0	5.8	14.0
75	80	88	122	43	4.3	16.1	6.9	16.1
90	80.0	104.0	138	41.0	5.1	17.0	8.2	17.0
110	80.0	124	158.0	40	6.3	18.2	10.0	18.0
125	175.0	135.0	158	102.0	7.1	25.5	11.4	25.5
140	89	155.0	188	39	8.0	27.4	12.7	25.0
160	90	175.0	212.0	45	9.1	26.2	14.6	25.0
180	180.0	186.0	217.0	127.0	10.2	26.5	16.4	26.5
200	213.0	229.0	268.0	144.0	11.4	31.5	18.2	31.5
225	100	235.0	268.0	35	12.8	33.0	20.5	32.0
250	273.0	275.0	320.0	205.0	14.2	34.0	22.7	34.0
280	110.0	291.0	320.0	35	15.9	32.0	25.5	35.0
315	379.0	334.0	371.0	35	17.9	35.0	28.7	35.0
355	175.0	373.0	430.0	-	21.1	40.0	32.3	40.0