




CHTS Series 过滤器

SIZE: 1/2"-8"

MATERIALS OF CONSTRUCTION

MATERIAL	UPVC, PP, CPVC, PPG, PVDF
SIZES	1/2", 3/4", 1", 1-1/4, 1-1/2", 2", 2-1/2", 3", 4", 5", 6", 8"
PRESSURE	Testing Pressure: 1/2"-4": 10kg/cm ² 5"~8": 6kg/cm ² Working Pressure: 1/2"~4": 7kg/cm ² 5"~8": 4kg/cm ²
END CONNECTIONS	Flange ends with in JIS; DIN; ANSI; BS STANDARD
WORKING TEMP	UPVC:0°C~60°C, PP:-20°C~90°C, PPG:-20°C~100°C, CPVC:0°C~90°C, PVDF:-40°C~120°C

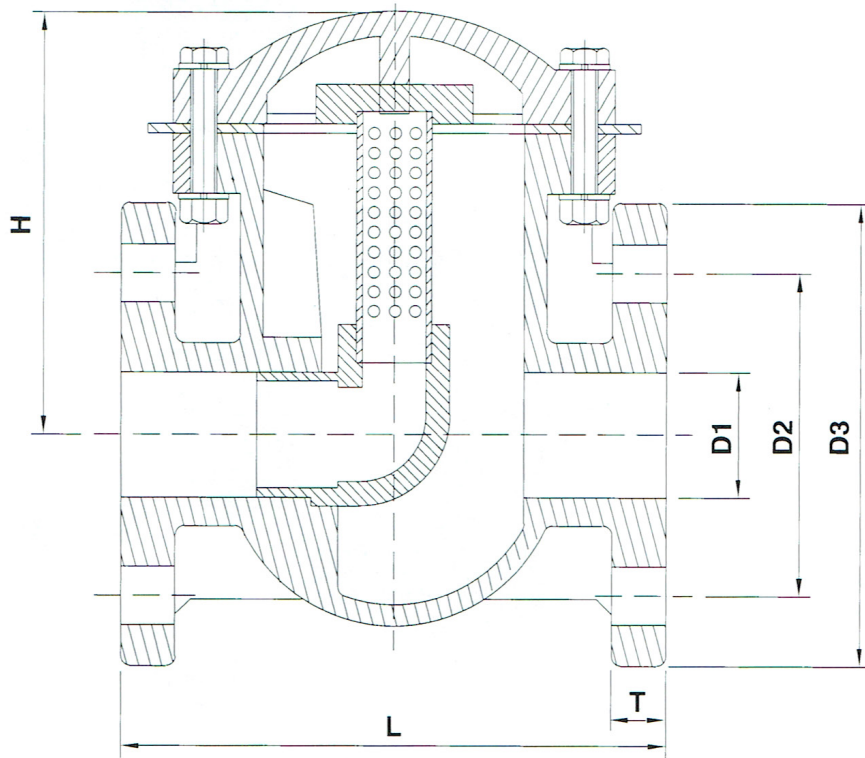

DN15~DN200

DIMENSIONS TABLE

Nom. Size DN-inch	D1	L	D2			D3			T	H	SCREEN (mm)
			JIS	DIN	ANSI	JIS	DIN	ANSI			
					(inch)			(inch)			
15-1/2"	25	160	70	65	2.38	95	95	3.50	15	129	2.5
20-3/4"	25	160	75	75	2.76	100	105	3.86	15	129	2.5
25-1"	25	160	90	85	3.13	125	125	4.25	15	129	2.5
32-1-1/4"	41	180	100	100	3.50	135	135	4.60	16	138	2.5
40-1-1/2"	41	180	150	110	3.88	140	140	5.51	18	138	2.5
50-2"	52	200	120	125	4.74	155	155	6.10	18	164	2.5
65-2-1/2"	80	260	140	145	5.49	175	175	6.88	20	171	2.5
80-3"	80	260	150	160	6.00	185	185	7.28	20	171	2.5
100-4"	100	300	175	180	7.50	210	210	8.26	24	213	2.5
125-5"	125	350	210	210	8.50	250	250	9.84	24	238	2.5
150-6"	150	400	240	240	9.51	280	280	11.62	30	268	2.5
200-8"	200	500	290	295	11.75	330	330	12.99	30	306	2.5